


O.E.M.

Bmw S38 B39

I-6cyl 3.8L 24v DOHC (DTs/DTs)



	intake	exhaust
camshaft data:		
lash ramp	: 0.25mm	0.25mm
duration @ 0.1mm	: 282°	274°
duration @ 1.0mm	: 236°	236°
valve lift	: 10.75mm	10.70mm
cam lift	: 10.75mm	10.70mm
lobe angle	: 110°	110°
timing @ 1.0mm	: 8° / 48°	48° / 8°
valve lift @ TDC	: 2.20mm	2.10mm
parts setup:		
cam wheels :	:	:
follower :	O.E.M.	O.E.M.
valve lash :	O.E.M.	O.E.M.
valve :	O.E.M.	O.E.M.
valve locks :	O.E.M.	O.E.M.
upper retainer :	O.E.M.	O.E.M.
lower retainer :	O.E.M.	O.E.M.
exterior spring :	O.E.M.	O.E.M.
interior spring :	O.E.M.	O.E.M.
fitted load / length	: 33kg @ 35.5mm	: 33kg @ 35.5mm
max. load / lift	: 92kg @ 12.0mm	: 92kg @ 12.0mm

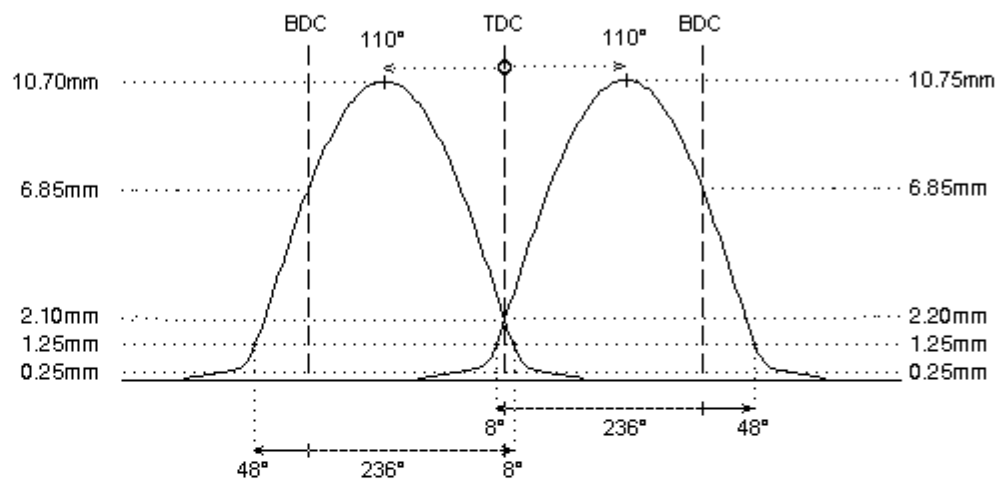

REMARKS :

these camshafts can also be used in M88 (3.4L) and S38B36 (3.6L) engines

REMARKS :