

O.E.M.

Ferrari 251 365 GTB/4 (352hp)
V-12cyl 4.4L 24v DOHC (DT/DT)



	intake	exhaust
camshaft data:		
lash ramp	: 0.25mm	0.25mm
duration @ 0.1mm	: 296°	292°
duration @ 1.0mm	: 252°	243°
valve lift	: 9.25mm	8.65mm
cam lift	:	
lobe angle	: 92°	86°
timing @ 1.0mm	: 33° / 39°	27° / 36°
valve lift @ TDC	: 4.65mm	4.80mm


parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:

fitted load / length	: 0kg @ 0.0mm	: 0kg @ 0.0mm
max. load / lift	: 0kg @ 0.0mm	: 0kg @ 0.0mm

REMARKS :

original valve spring info is not available

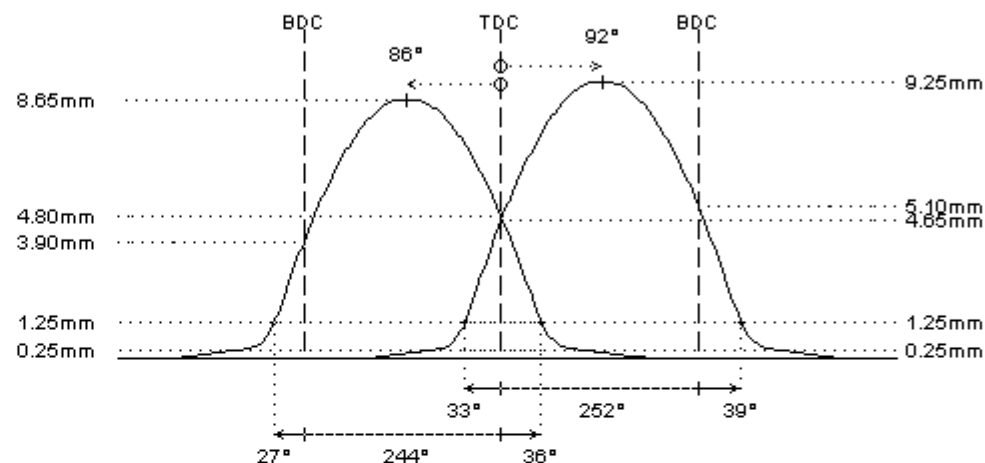

REMARKS :

- # - steel billet camshafts
- camshafts driven by meshed gears
- spline drive on both exhaust cams for distributors