

O.E.M.

Ferrari 400 (340hp)
V-12cyl 4.8L 24v DOHC



	intake	exhaust
camshaft data:		
lash ramp	: 0.20mm	0.20mm
duration @ 0.1mm	: 285°	272°
duration @ 1.0mm	: 237°	229°
valve lift	: 9.40mm	8.60mm
cam lift	: 9.40mm	8.60mm
lobe angle	: 87°	92°
timing @ 1.0mm	: 32° / 25°	27° / 22°
valve lift @ TDC	: 4.70mm	3.45mm


parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:

fitted load / length	: 0kg @ 0.0mm	: 0kg @ 0.0mm
max. load / lift	: 0kg @ 0.0mm	: 0kg @ 0.0mm

REMARKS :

original valve spring info is not available

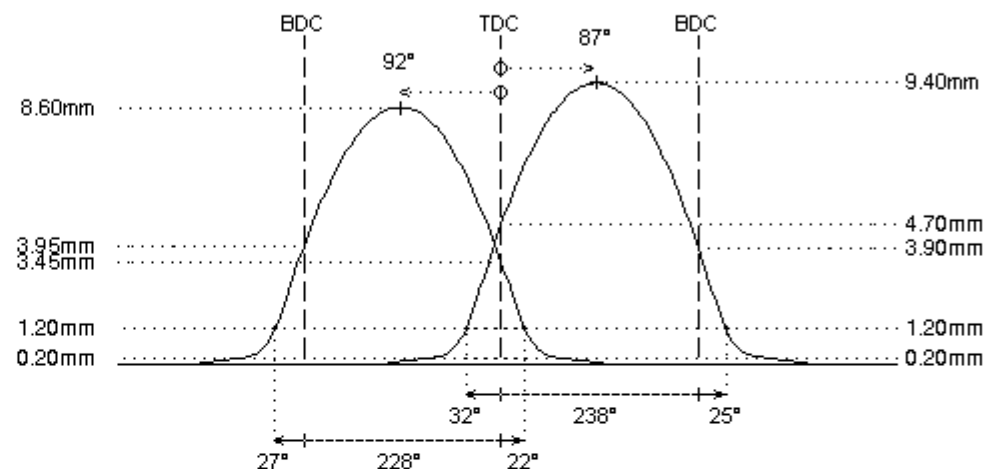

REMARKS :

- # - steel billet camshafts
- camshafts driven by chain
- spline drive on only 1 exhaust cam for distributor