

1900642

sport

Fiat A112 2.000

I-4cyl 1.0L 8v OHV (FT/FT)

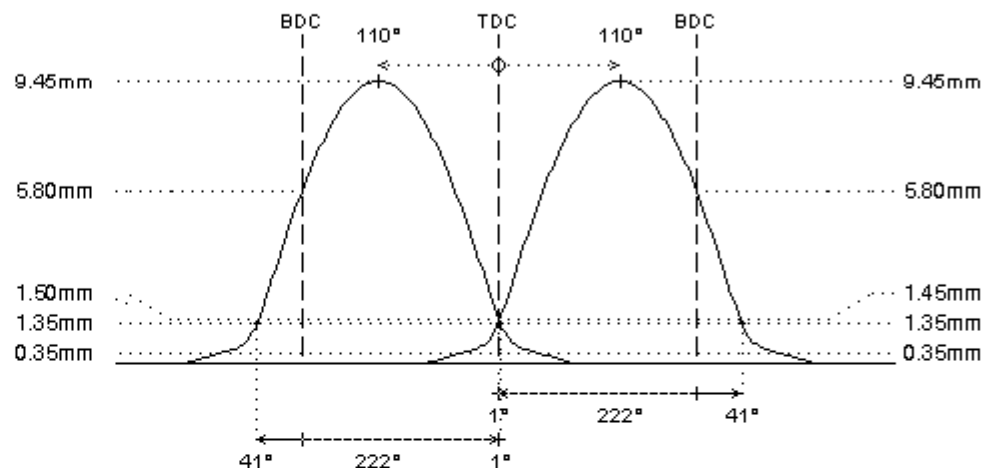
**intake****exhaust****camshaft data:**

lash ramp	: 0.35mm	0.35mm
duration @ 0.1mm	: 273°	273°
duration @ 1.0mm	: 222°	222°
valve lift	: 9.45mm	9.45mm
cam lift	: 6.75mm	6.75mm
lobe angle	: 110°	110°
timing @ 1.0mm	: 1° / 41°	41° / 1°
valve lift @ TDC	: 1.45mm	1.50mm

parts setup:

cam wheels :	:	:
follower :	CAT050	CAT050
valve lash :	O.E.M.	O.E.M.
valve :	O.E.M.	O.E.M.
valve locks :	O.E.M.	O.E.M.
upper retainer :	O.E.M.	O.E.M.
lower retainer :	O.E.M.	O.E.M.
exterior spring :	O.E.M.	O.E.M.
interior spring :		

fitted load / length	: 0kg @ 37.3mm	: 0kg @ 37.3mm
max. load / lift	: 0kg @ 10.0mm	: 0kg @ 10.0mm

REMARKS :**REMARKS :**

- # - bearing diameters: 38.00 - 43.35 - 31.00mm
 - indicate when cam core must be undercut for connection rod clearance (Abarth)