

1900708

hot street - dirt track

Fiat 156.A2.100 fire (55hp)

I-4cyl 1.0L 8v SOHC (DT/DT)



camshaft data:


	intake	exhaust
lash ramp	: 0.20mm	0.20mm
duration @ 0.1mm	: 283°	283°
duration @ 1.0mm	: 245°	245°
valve lift	: 10.00mm	10.00mm
cam lift	: 10.00mm	10.00mm
lobe angle	: 108°	108°
timing @ 1.0mm	: 15° / 50°	51° / 14°
valve lift @ TDC	: 2.75mm	2.75mm

parts setup:

cam wheels :	:  CTFI031	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:

fitted load / length	: 17kg @ 32.5mm	: 17kg @ 32.5mm
max. load / lift	: 63kg @ 10.5mm	: 63kg @ 10.5mm

REMARKS :

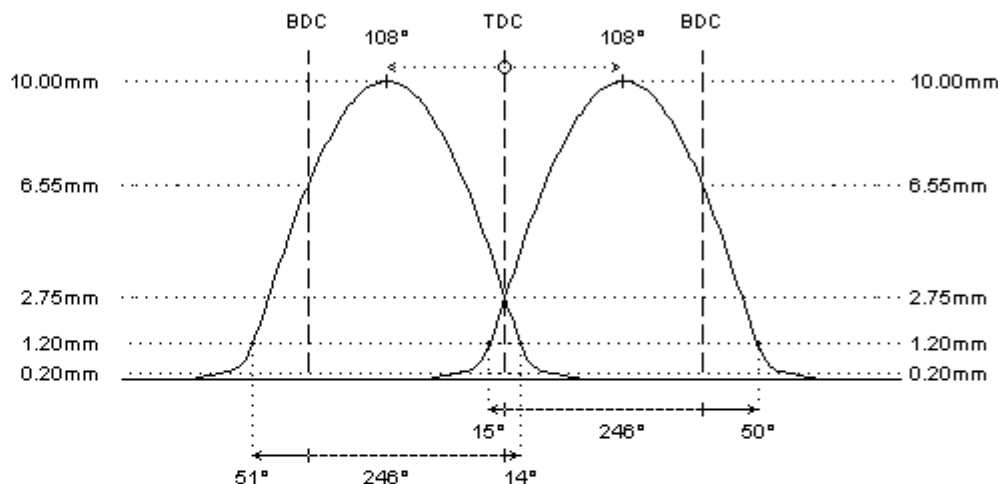

REMARKS :

steel billet camshafts