

2291101

F.I.A.

Ford ZH12 Sigma

I-4cyl 1.2L 16v DOHC (DTs/DTs)



intake exhaust

camshaft data:


lash ramp	: 0.30mm	0.30mm
duration @ 0.1mm	: 234°	234°
duration @ 1.0mm	: 194°	194°
valve lift	: 7.15mm	7.15mm
cam lift	: 7.15mm	7.15mm
lobe angle	: 108°	102°
timing @ 1.0mm	: -11° / 25°	19° / -5°
valve lift @ TDC	: 0.55mm	0.90mm

parts setup:

cam wheels :	:	:
follower :	O.E.M.	O.E.M.
valve lash :	O.E.M.	O.E.M.
valve :	O.E.M.	O.E.M.
valve locks :	O.E.M.	O.E.M.
upper retainer :	O.E.M.	O.E.M.
lower retainer :	O.E.M.	O.E.M.
exterior spring :	O.E.M.	O.E.M.
interior spring :	:	:

fitted load / length	: 22kg @ 36.0mm	: 22kg @ 36.0mm
max. load / lift	: 39kg @ 11.5mm	: 39kg @ 11.5mm

REMARKS :

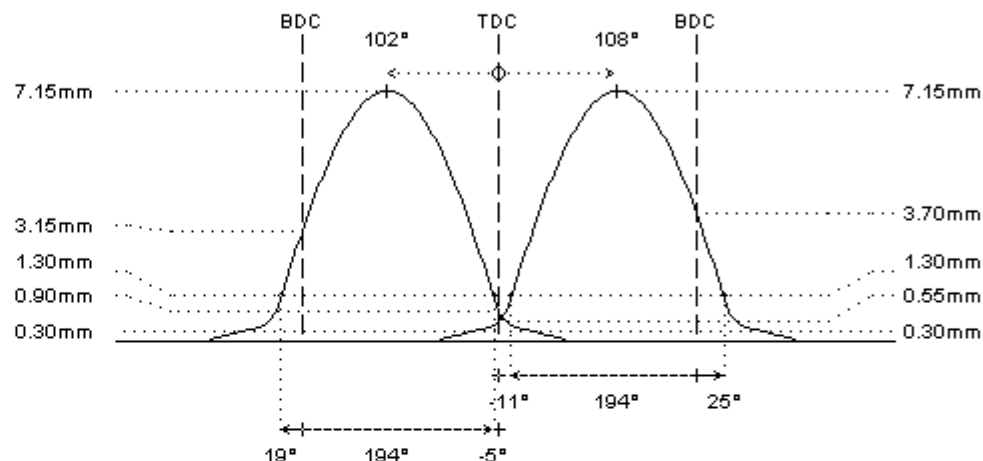

REMARKS :

for engines with 28mm cam followers / 25mm lash adjustment shims (between cam and follower), please contact Cat Cams if different