

2502812

tarmac rally - race

Honda D16Z6 123 hp

I-4cyl 1.6L 16v SOHC

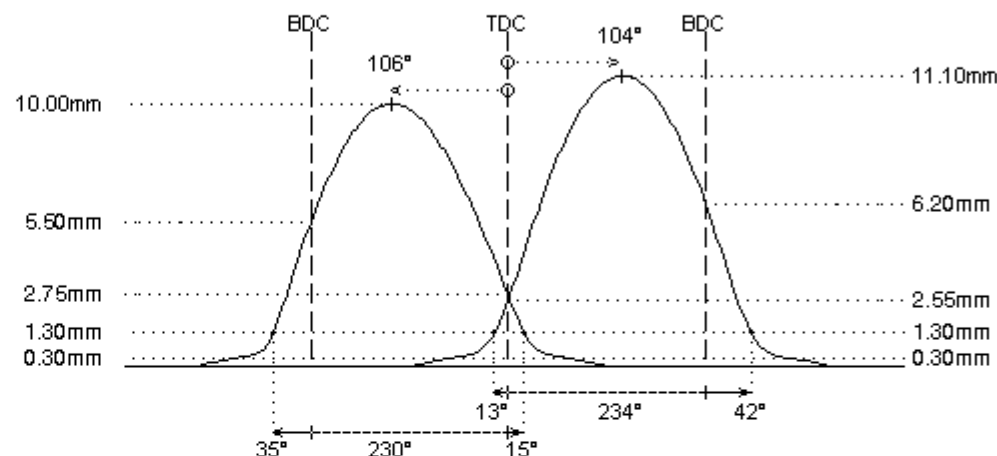
**intake****exhaust****camshaft data:**

lash ramp	: 0.28mm	: 0.28mm
duration @ 0.1mm	: 288° (255)	: 285° (285)
duration @ 1.0mm	: 235° (217)	: 230° (230)
valve lift	: 11.10mm (8.90)	: 10.00mm (10.00)
cam lift	: 6.75mm (5.55)	: 5.55mm (5.55)
lobe angle	: 104° (108)	: 106° (108)
timing @ 1.0mm	: 13° / 42°	: 35° / 15°
valve lift @ TDC	: 2.55mm (1.40)	: 2.75mm (2.75)

parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:

fitted load / length	: 0kg @ 0.0mm	: 0kg @ 0.0mm
max. load / lift	: 0kg @ 0.0mm	: 0kg @ 0.0mm

REMARKS :**REMARKS :**

ONLY for dirt track applications and pro street use with adjustable engine management or carburetors