

2505002

sport

Honda J30A4

V-60°-6cyl 3.0L 24v SOHC

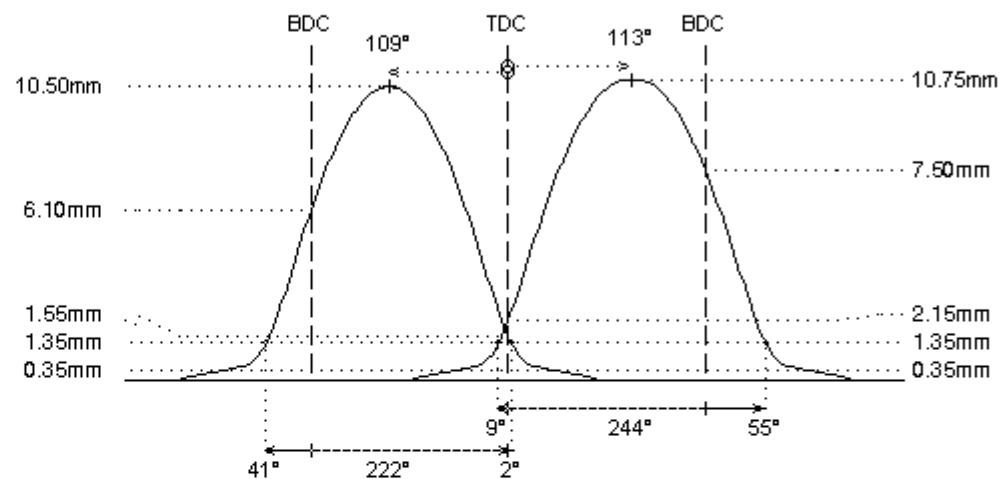
**intake****exhaust****camshaft data:**

lash ramp	: 0.33mm	: 0.35mm
duration @ 0.1mm	: 298° (238)	: 272° (272)
duration @ 1.0mm	: 244° (184)	: 223° (223)
valve lift	: 10.75mm (9.00)	: 10.50mm (10.50)
cam lift	: 6.45mm (5.35)	: 6.55mm (6.55)
lobe angle	: 113° (109)	: 109° (109)
timing @ 1.0mm	: 9° / 55°	: 41° / 2°
valve lift @ TDC	: 2.15mm (0.55)	: 1.55mm (1.55)

parts setup:

cam wheels :	:	:
follower :	: O.E.M.	: O.E.M.
valve lash :	: O.E.M.	: O.E.M.
valve :	: O.E.M.	: O.E.M.
valve locks :	: O.E.M.	: O.E.M.
upper retainer :	: O.E.M.	: O.E.M.
lower retainer :	: O.E.M.	: O.E.M.
exterior spring :	: O.E.M.	: O.E.M.
interior spring :	:	:

fitted load / length	: 21kg @ 43.0mm	: 26kg @ 43.0mm
max. load / lift	: 56kg @ 10.3mm	: 67kg @ 11.0mm

REMARKS :**REMARKS :**

ECU reprogramming advised