

2702802

hot street - dirt track

Hyundai G4GF Beta 2

I-4cyl 2.0L 16v DOHC

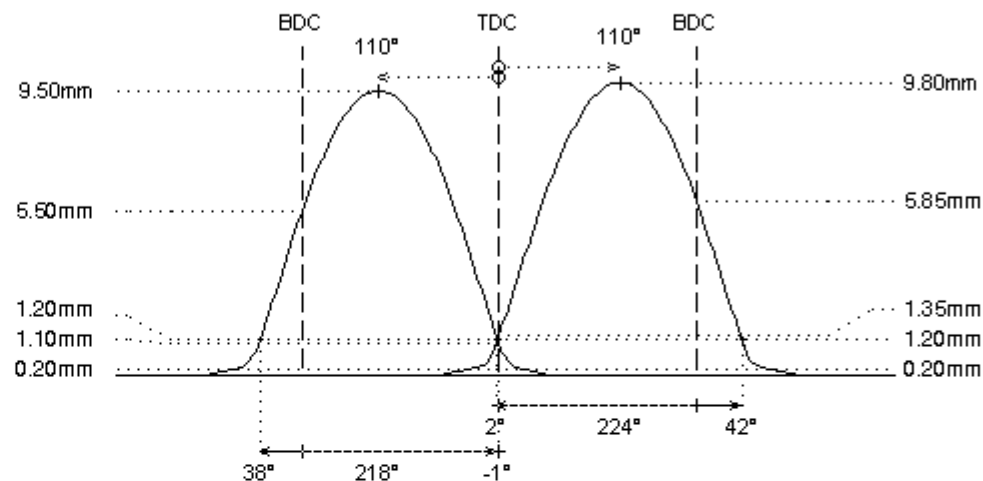


	intake	exhaust
camshaft data:		
lash ramp	: 0.20mm	0.20mm
duration @ 0.1mm	: 256°	248°
duration @ 1.0mm	: 224°	217°
valve lift	: 9.80mm	9.50mm
cam lift	: 9.80mm	9.50mm
lobe angle	: 110°	110°
timing @ 1.0mm	: 2° / 42°	38° / -1°
valve lift @ TDC	: 1.35mm	1.10mm

parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:

fitted load / length	: 25kg @ 37.2mm	: 27kg @ 36.5mm
max. load / lift	: 60kg @ 10.0mm	: 60kg @ 9.5mm

REMARKS :**REMARKS :**

- # Only for G4GF Beta2 engines with mechanical cam followers with shims on top
- # ECU reprogramming required