

4013302


hot street - dirt track

Mercedes M133.980 A45 AMG

I-4cyl 2.0L 16v DOHC



	intake	exhaust
camshaft data:		
lash ramp	: hydro	hydro
duration @ 0.1mm	: 264°	272°
duration @ 1.0mm	: 208°	216°
valve lift	: 11.00mm	11.00mm
cam lift	: 5.56mm	5.56mm
lobe angle	: 114°	126°
timing @ 1.0mm	: -10° / 38°	54° / -18°
valve lift @ TDC	: 0.35mm	0.20mm
parts setup:		
cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: 99650/S	: 99650/S
lower retainer	: 99649/O	: 99649/O
exterior spring	: PAC-E99864	: PAC-E99864
interior spring	: PAC-I99864	: PAC-I99864
fitted load / length	: 35kg @ 32.0mm	: 35kg @ 34.9mm
max. load / lift	: 85kg @ 12.0mm	: 85kg @ 12.0mm

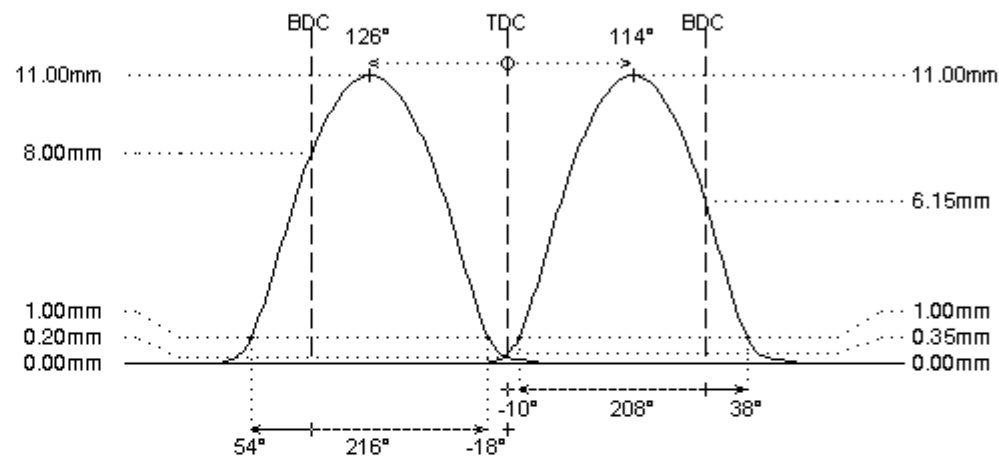

REMARKS :

billet steel cams including cam trigger wheels

ECU reprogramming required

REMARKS :