

O.E.M.

Mitsubishi 6G72 3000 GT

V-6cyl 3.0L 24v DOHC (RPRH/RPRH)




	intake	exhaust
camshaft data:		
lash ramp	: hydro	hydro
duration @ 0.1mm	: 252°	248°
duration @ 1.0mm	: 199°	195°
valve lift	: 9.50mm	9.00mm
cam lift	: 5.50mm	5.20mm
lobe angle	: 110°	110°
timing @ 1.0mm	: -9° / 28°	26° / -11°
valve lift @ TDC	: 0.45mm	0.40mm

parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:

fitted load / length	: 28kg @ 37.5mm	: 29kg @ 37.0mm
max. load / lift	: 69kg @ 10.5mm	: 69kg @ 10.0mm

REMARKS :

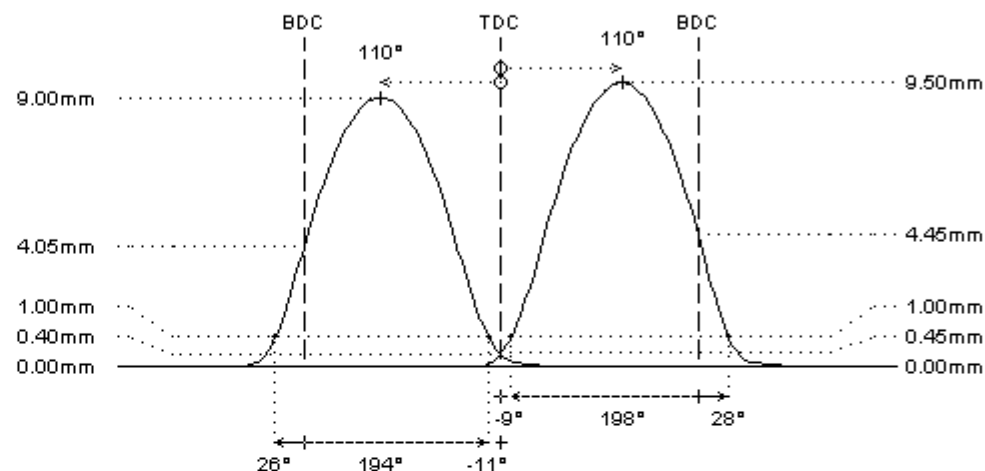

REMARKS :

- # The exact valve timing data of the original camshafts are not known. Valve timing data are illustrated on estimated peak angle of 110°. The actual valve timing in the engine may be different, as well as the indicated lift at TDC.