


O.E.M.

Citroën ES9J4S / XFX 206hp, VVT in
V-6cyl 2.9L 24v DOHC (DTH/DTH)



	intake	exhaust
camshaft data:		
lash ramp	: hydro	hydro
duration @ 0.1mm	: 245°	258°
duration @ 1.0mm	: 197°	211°
valve lift	: 8.70mm	8.95mm
cam lift	:	
lobe angle	: 110°	110°
timing @ 1.0mm	: -11° / 28°	36° / -5°
valve lift @ TDC	: 0.20mm	0.55mm
parts setup:		
cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:
fitted load / length	: 25kg @ 36.3mm	: 25kg @ 36.3mm
max. load / lift	: 52kg @ 9.5mm	: 52kg @ 9.5mm

REMARKS :

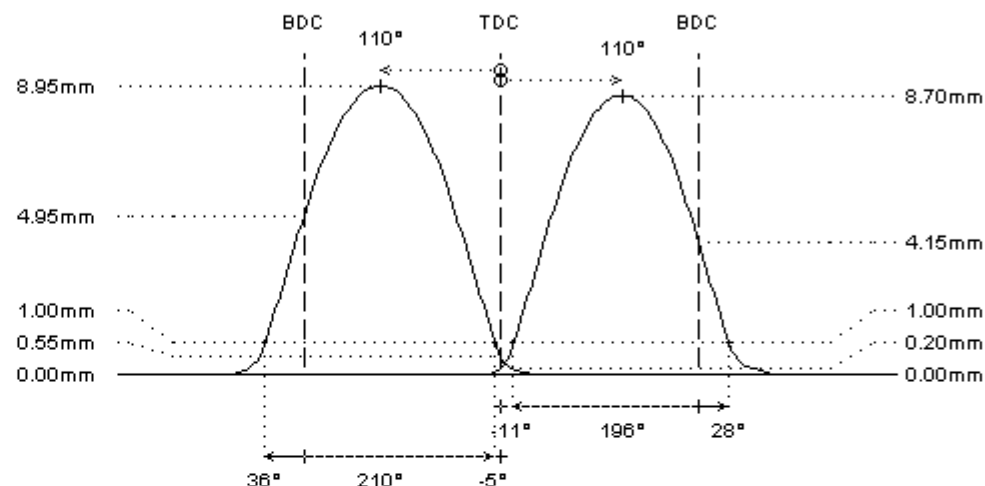

REMARKS :

- # The original VVT system can be fitted on these camshafts. However, we strongly suggest to limit the range or disable the VVT system (see remarks).