

6402301

hot street - dirt track

Subaru EJ20

B-4cyl 2.0L 16v DOHC (DTH/DTH)



intake

exhaust

camshaft data:

lash ramp	: hydro	hydro
duration @ 0.1mm	: 269°	266°
duration @ 1.0mm	: 225°	222°
valve lift	: 10.00mm	9.35mm
cam lift	:	
lobe angle	: 108°	108°
timing @ 1.0mm	: 4° / 41°	39° / 3°
valve lift @ TDC	: 1.50mm	1.30mm


parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:

fitted load / length	: 0kg @ 0.0mm	: 0kg @ 0.0mm
max. load / lift	: 0kg @ 0.0mm	: 0kg @ 0.0mm

REMARKS :

original valve spring info is not available

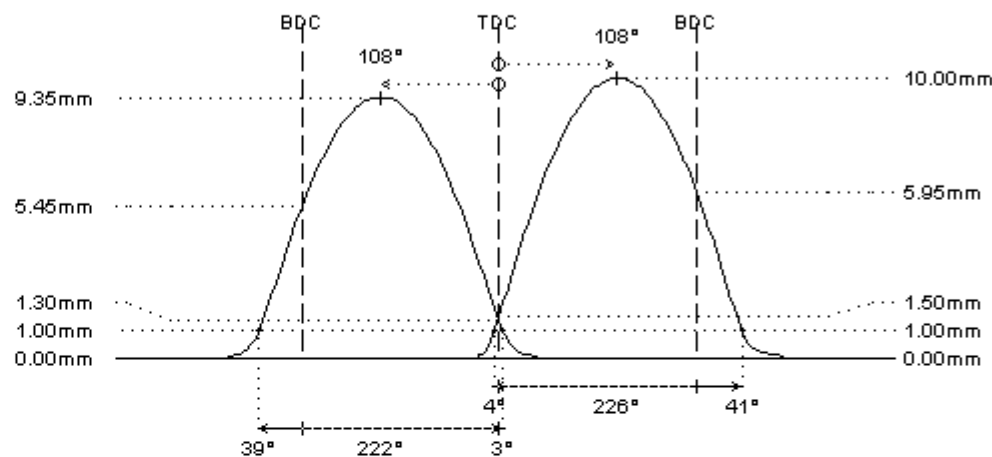

REMARKS :

- # - bearing diameters: 32.0mm - 28.0mm - 28.0mm
- cam base diameter: 34.0mm
- cam followers: hydraulic tappet 33mm
- # check std valve spring setup for coil bind length and use valve spring kit if required