

6404003

sport

Subaru EG33

B-6cyl 3.3L 24v QOHC (DTH/DTH)

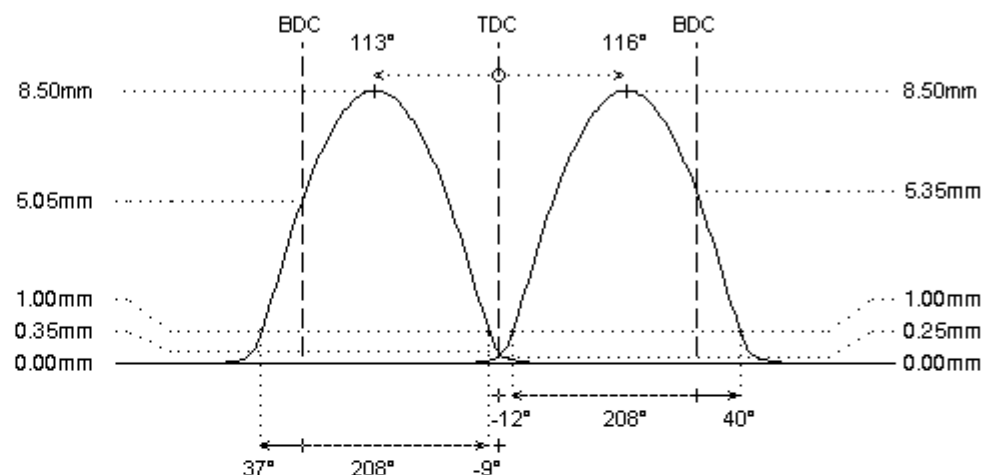
**intake****exhaust****camshaft data:**

lash ramp	: hydro	hydro
duration @ 0.1mm	: 258°	258°
duration @ 1.0mm	: 208°	208°
valve lift	: 8.50mm	8.50mm
cam lift	:	
lobe angle	: 116°	113°
timing @ 1.0mm	: -12° / 40°	37° / -9°
valve lift @ TDC	: 0.25mm	0.35mm

parts setup:

cam wheels :	:	:
follower :	O.E.M.	O.E.M.
valve lash :	O.E.M.	O.E.M.
valve :	O.E.M.	O.E.M.
valve locks :	O.E.M.	O.E.M.
upper retainer :	O.E.M.	O.E.M.
lower retainer :	O.E.M.	O.E.M.
exterior spring :	O.E.M.	O.E.M.
interior spring :	O.E.M.	O.E.M.

fitted load / length	: 20kg @ 29.0mm	: 20kg @ 29.0mm
max. load / lift	: 50kg @ 8.5mm	: 50kg @ 8.5mm

REMARKS :**REMARKS :**

- # **steel billet camshafts for use in EG33 engine:**
- exhaust camshafts driven by belt
 - intake camshafts driven by **internal meshed gear**

MORE PROFILE OPTIONS ON REQUEST