

7100702

hot street - dirt track

Toyota 2ZZ-GE VVTL-i

I-4cyl 1.8L 16v DOHC (RP/RP)




	intake	exhaust
camshaft data:		
lash ramp	: 0.35mm	: 0.35mm
duration @ 0.1mm	: 328° (270)	: 321° (270)
duration @ 1.0mm	: 258° (204)	: 250° (204)
valve lift	: 11.75mm (8.55)	: 10.50mm (8.55)
cam lift	: 6.80mm (5.40)	: 6.15mm (5.40)
lobe angle	: 130° (124)	: 102° (100)
timing @ 1.0mm	: -1° / 79°	: 47° / 23°
valve lift @ TDC	: 1.30mm (0.50)	: 3.70mm (1.50)

parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:
fitted load / length	: 22kg @ 38.8mm	: 22kg @ 38.3mm
max. load / lift	: 60kg @ 12.0mm	: 58kg @ 10.5mm

REMARKS :

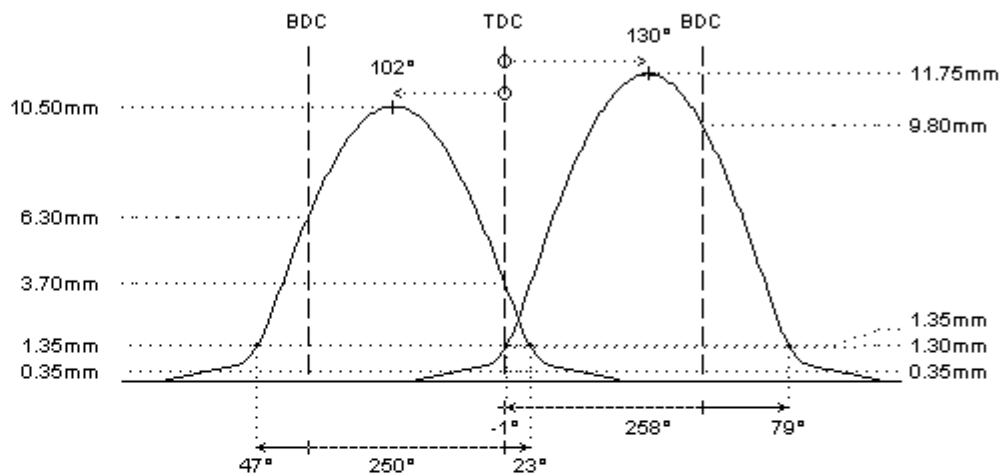

REMARKS :

ECU reprogramming advised