

7102703

hot street - dirt track

Toyota 2ZZ-GE VVTL-i

I-4cyl 1.8L 16v DOHC (RP/RP)



camshaft data:


	intake	exhaust
lash ramp	: 0.30mm	0.30mm
duration @ 0.1mm	: 294°	286°
duration @ 1.0mm	: 242°	234°
valve lift	: 12.00mm	11.50mm
cam lift	: 6.85mm	6.60mm
lobe angle	: 130°	102°
timing @ 1.0mm	: -9° / 71°	39° / 15°
valve lift @ TDC	: 0.75mm	2.90mm

parts setup:

cam wheels :	:	:
follower	: INFO	: INFO
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: 99527/s	: 99527/s
lower retainer	: 99528/O	: 99528/O
exterior spring	: PAC-E19864	: PAC-E19864
interior spring	: PAC-I19864	: PAC-I19864
fitted load / length	: 28kg @ 34.0mm	: 28kg @ 34.0mm
max. load / lift	: 89kg @ 14.5mm	: 89kg @ 14.5mm

REMARKS :

- # Only use Ferrea Roller rockers with these camshafts.
- # Use valve locks of Renault Clio RS

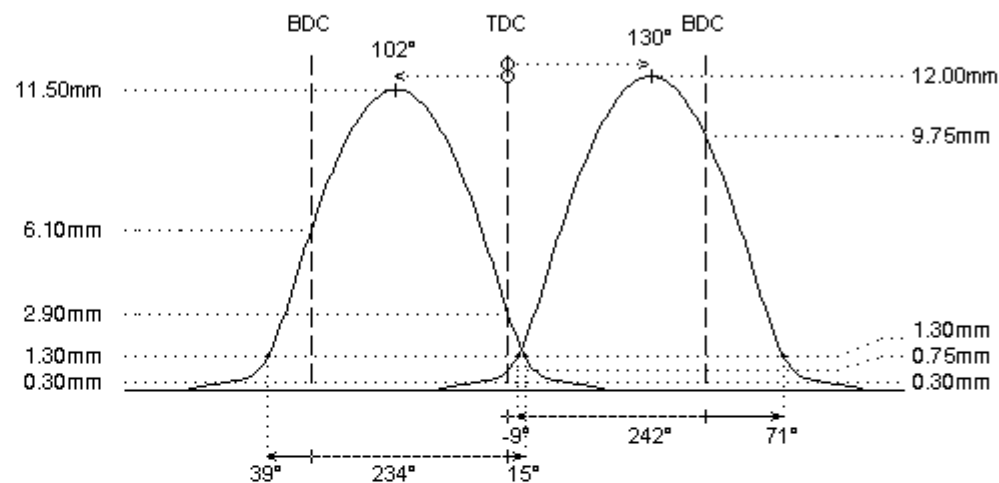

REMARKS :

- # Camshafts to be used with Ferrea Roller rockers only.