

7300421

sport

Triumph TR6PI TR6

I-6cyl 2.0L 12v SOHC (FT/FT)



	intake	exhaust
camshaft data:		
lash ramp	: 0.38mm	0.38mm
duration @ 0.1mm	: 265°	265°
duration @ 1.0mm	: 216°	216°
valve lift	: 9.75mm	9.75mm
cam lift	: 6.50mm	6.50mm
lobe angle	: 110°	110°
timing @ 1.0mm	: -2° / 38°	38° / -2°
valve lift @ TDC	: 1.20mm	1.20mm


parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:

fitted load / length	: 0kg @ 0.0mm	: 0kg @ 0.0mm
max. load / lift	: 0kg @ 0.0mm	: 0kg @ 0.0mm

REMARKS :

- # original valve spring info is not available
- # valve spring kit can be developed on request
- # check std valve spring setup for coil bind length and use valve spring kit if required

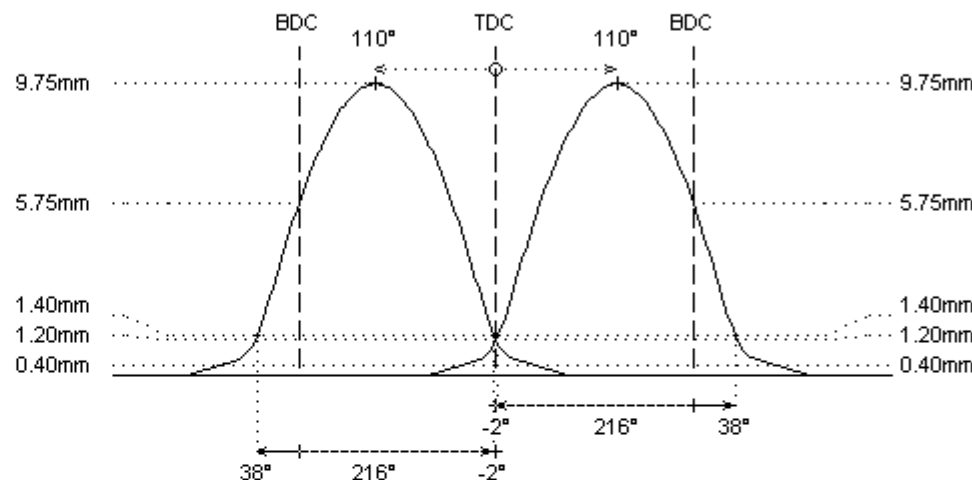

REMARKS :

- # camshafts are ground on new blanks