

7606144

sport

Volkswagen 2G, AAV 55hp

I-4cyl 1.3L 8v SOHC (DTH/DTH)

**intake****exhaust****camshaft data:**

lash ramp	: hydro	hydro
duration @ 0.1mm	: 251°	251°
duration @ 1.0mm	: 215°	215°
valve lift	: 8.20mm	8.20mm
cam lift	:	
lobe angle	: 109°	109°
timing @ 1.0mm	: -2° / 37°	36° / -1°
valve lift @ TDC	: 0.85mm	0.95mm

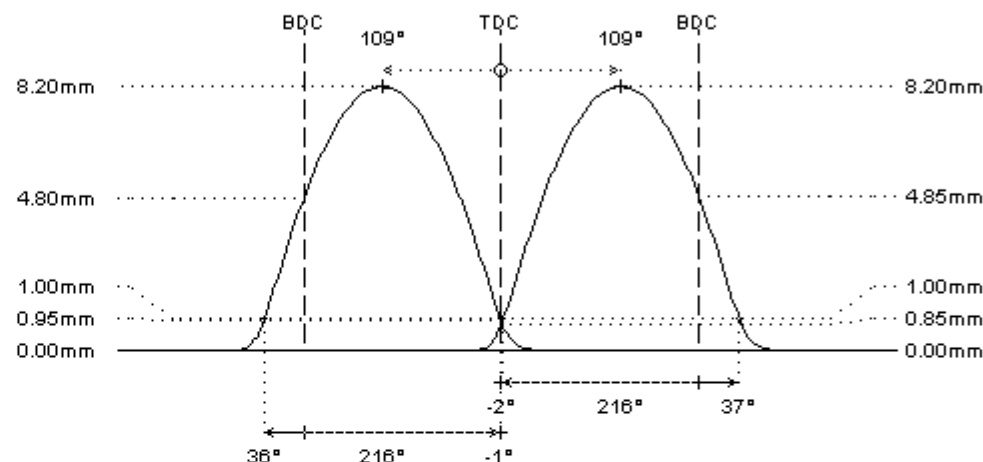
parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:

fitted load / length	: 0kg @ 0.0mm	: 0kg @ 0.0mm
max. load / lift	: 0kg @ 0.0mm	: 0kg @ 0.0mm

REMARKS :

original valve spring info is not available

**REMARKS :**

- # Different OEM camshafts were used in this engine family. For ordering the correct sports camshaft, please check:
- engine reference code
 - cam reference code
 - cam lift
 - keyway position: centered between 1st and 2nd cam lobe (54°)(76061xx) OR close to 1st cam lobe (22°)(76161xx)

Example: engine code "2G" has camshaft code "030 E", cam lift "7.2mm" and centered keyway.