

O.E.M.


Volkswagen AFH 101hp

I-4cyl 1.4L 16v DOHC (DTH/DTH)



	intake	exhaust
camshaft data:		
lash ramp	: hydro	hydro
duration @ 0.1mm	: 242°	242°
duration @ 1.0mm	: 200°	200°
valve lift	: 8.50mm	8.50mm
cam lift	:	
lobe angle	: 112°	108°
timing @ 1.0mm	: -12° / 32°	28° / -8°
valve lift @ TDC	: 0.20mm	0.45mm
parts setup:		
cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:
fitted load / length	: 24kg @ 34.0mm	: 24kg @ 34.0mm
max. load / lift	: 64kg @ 10.0mm	: 64kg @ 10.0mm

REMARKS :

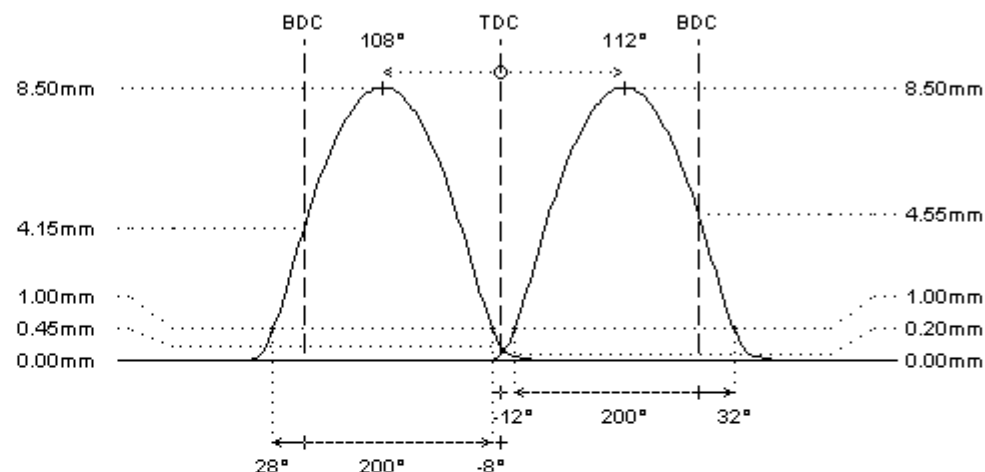

REMARKS :

- # These camshafts can only be used in the AFH engine. This engine features bucket type cam followers (direct tappet), whereas other small block 16v engines have finger followers with rollers (see engine list).