

7607602

hot street - dirt track


Volkswagen AQP-AUE 150kW, connecting chain with VVT tensioner

VR-6cyl 2.8L 24v DOHC



	intake	exhaust
camshaft data:		
lash ramp	: hydro	hydro
duration @ 0.1mm	: 272°	268°
duration @ 1.0mm	: 225°	221°
valve lift	: 11.00mm	11.00mm
cam lift	: 5.50mm	5.50mm
lobe angle	: 108°	108°
timing @ 1.0mm	: 4° / 41°	38° / 3°
valve lift @ TDC	: 1.45mm	1.30mm
parts setup:		
cam wheels :	:	:
follower :	O.E.M.	O.E.M.
valve lash :	O.E.M.	O.E.M.
valve :	O.E.M.	O.E.M.
valve locks :	O.E.M.	O.E.M.
upper retainer :	O.E.M.	O.E.M.
lower retainer :	O.E.M.	O.E.M.
exterior spring :	O.E.M.	O.E.M.
interior spring :		
fitted load / length	: 25kg @ 38.0mm	: 25kg @ 38.0mm
max. load / lift	: 61kg @ 11.5mm	: 61kg @ 11.5mm

REMARKS :

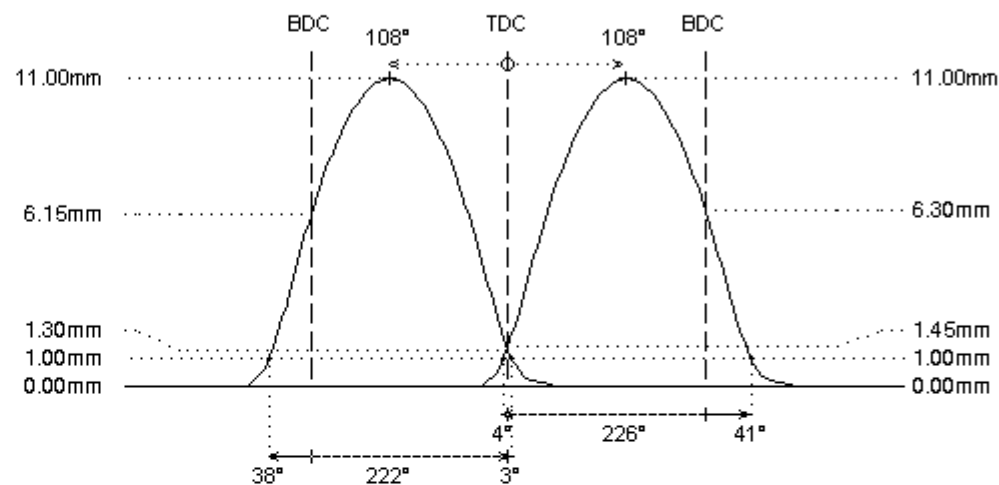

REMARKS :

- # - camshafts for use in AQP-AUE (2.8L) engines with connecting chain and VVT tensioner between intake and exhaust
- # check distance between valve seal and retainer to be at least 0.6mm at full lift
- # ECU reprogramming required