7650251


hot street - dirt track

Volkswagen hydraulic tappets, 8mm valves, MK-8H

I-4cyl 1.8L 8v SOHC (DTH/DTH)

	intake	exhaust
camshaft data:		
lash ramp	: hydro	hydro
duration @ 0.1mm	: 283°	283°
duration @ 1.0mm	: 247°	247°
valve lift	: 11.50mm	11.50mm
cam lift	:	
lobe angle	: 106°	106°
timing @ 1.0mm	: 18° / 49°	50° / 17°
valve lift @ TDC	: 3.25mm	3.25mm
parts setup:		
cam wheels :	: CCR3232	: CCR3232
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	: O.E.M.	: O.E.M.
fitted load / length	: 27kg @ 32.5mm	: 27kg @ 32.5mm
max. load / lift	: 75kg @ 11.5mm	: 75kg @ 11.5mm

REMARKS :

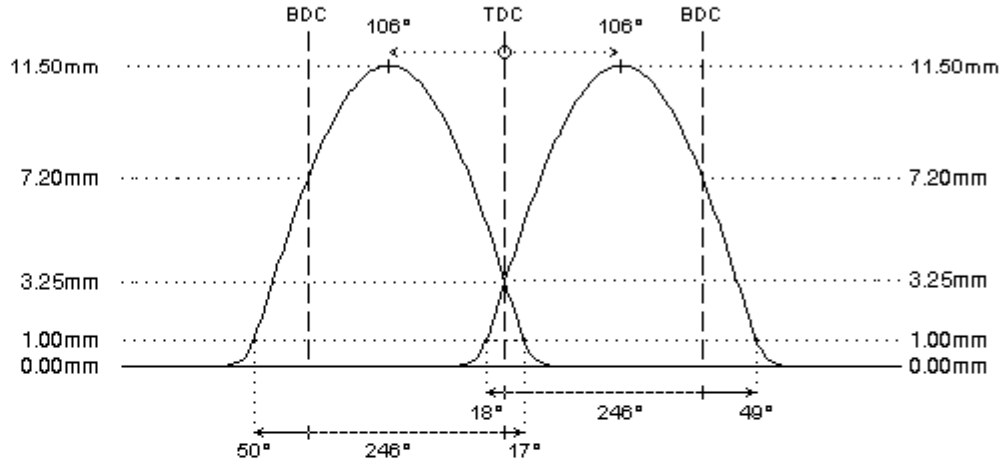

REMARKS :