

7650255

turbo conversion

Volkswagen hydraulic tappets, 8mm valves, MK-8H

I-4cyl 1.8L 8v SOHC (DTH/DTH)




	intake	exhaust
camshaft data:		
lash ramp	: hydro	hydro
duration @ 0.1mm	: 267°	257°
duration @ 1.0mm	: 232°	220°
valve lift	: 11.20mm	10.15mm
cam lift	:	
lobe angle	: 110°	120°
timing @ 1.0mm	: 6° / 46°	50° / -10°
valve lift @ TDC	: 1.70mm	0.25mm

parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	: O.E.M.	: O.E.M.

fitted load / length	: 27kg @ 32.5mm	: 27kg @ 32.5mm
max. load / lift	: 75kg @ 11.5mm	: 75kg @ 11.5mm

REMARKS :

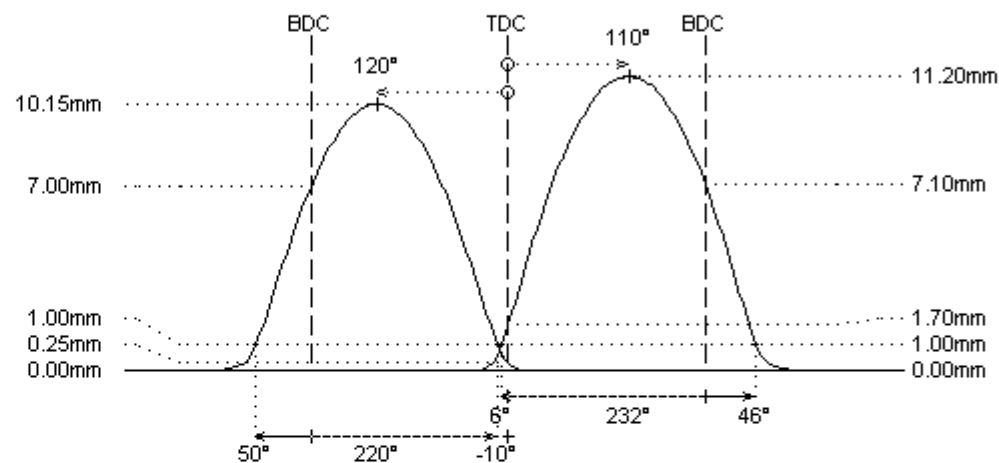

REMARKS :

for TURBO conversion (atmospheric to turbo)