

O.E.M.

Volkswagen 2E(92-94), ADY (94-95), AGG (95-97) hydraulic tappets, 7mm valves, MK-7H
I-4cyl 2.0L 8v SOHC (DTH/DTH)



intake exhaust

camshaft data:

lash ramp	: hydro	hydro
duration @ 0.1mm	: 259°	258°
duration @ 1.0mm	: 220°	220°
valve lift	: 10.20mm	10.20mm
cam lift	:	
lobe angle	: 110°	110°
timing @ 1.0mm	: -0° / 40°	40° / -0°
valve lift @ TDC	: 1.05mm	1.05mm


parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:

fitted load / length	: 30kg @ 34.0mm	: 31kg @ 33.7mm
max. load / lift	: 61kg @ 11.2mm	: 61kg @ 11.0mm

REMARKS :

measurements are taken in 2E cylinder head (048 103 373)

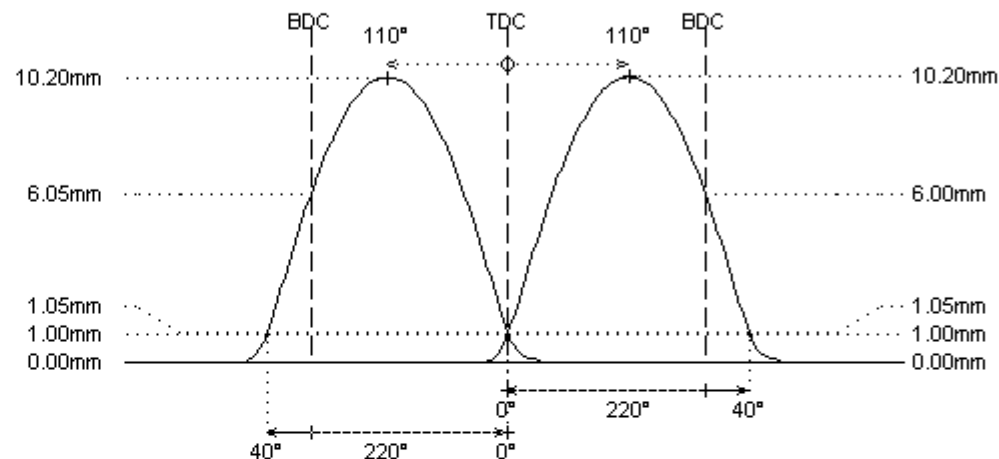

REMARKS :

specifications for "026 109 101A" camshaft (as found in GX, PG, 2E, ...)