

7650290

turbo conversion

Volkswagen 2E(92-94), ADY (94-95), AGG (95-97) hydraulic tappets, 7mm valves, MK-7H
I-4cyl 2.0L 8v SOHC (DTH/DTH)



camshaft data:

	intake	exhaust
lash ramp	: hydro	hydro
duration @ 0.1mm	: 272°	257°
duration @ 1.0mm	: 233°	220°
valve lift	: 11.00mm	10.15mm
cam lift	:	
lobe angle	: 110°	120°
timing @ 1.0mm	: 6° / 47°	50° / -10°
valve lift @ TDC	: 1.75mm	0.30mm


parts setup:

cam wheels :	: CCR3232	: CCR3232
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	

fitted load / length	: 30kg @ 34.0mm	: 31kg @ 33.7mm
max. load / lift	: 61kg @ 11.2mm	: 61kg @ 11.0mm

REMARKS :

measurements are taken in 2E cylinder head (048 103 373)

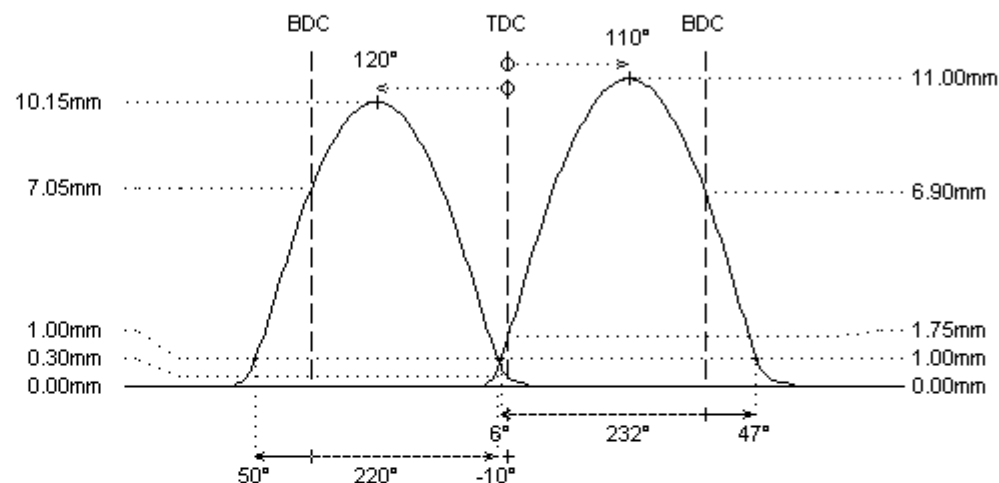

REMARKS :

for TURBO conversion (atmospheric to turbo)