

7901401

sport


Volvo B230 B19 - B21 - B23 - B230

I-4cyl 2.3L 8v SOHC (DTs/DTs)



	intake	exhaust
camshaft data:		
lash ramp	: 0.30mm	0.30mm
duration @ 0.1mm	: 288°	277°
duration @ 1.0mm	: 243°	238°
valve lift	: 11.00mm	10.50mm
cam lift	: 11.00mm	10.50mm
lobe angle	: 110°	110°
timing @ 1.0mm	: 11° / 52°	49° / 9°
valve lift @ TDC	: 2.45mm	2.20mm
parts setup:		
cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:
fitted load / length	: 30kg @ 38.0mm	: 30kg @ 38.0mm
max. load / lift	: 80kg @ 12.0mm	: 80kg @ 12.0mm

REMARKS :

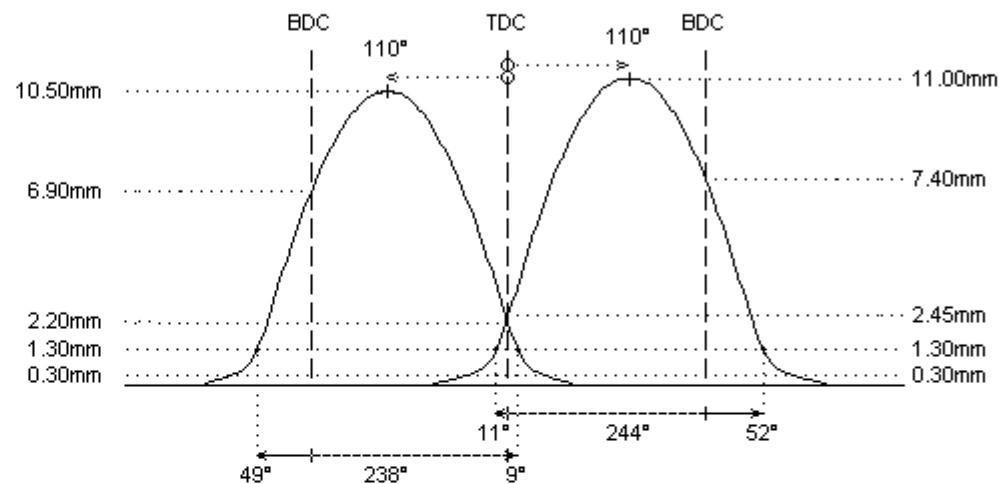

REMARKS :

- # Volvo has used many different camshaft specifications. Please indicate STD cam base diameter and cam height when ordering sports camshafts. Depending on the engine version and application, extra modifications may be required.
- # ONLY for dirt track applications and pro street use with adjustable engine management or carburetors