

7901402

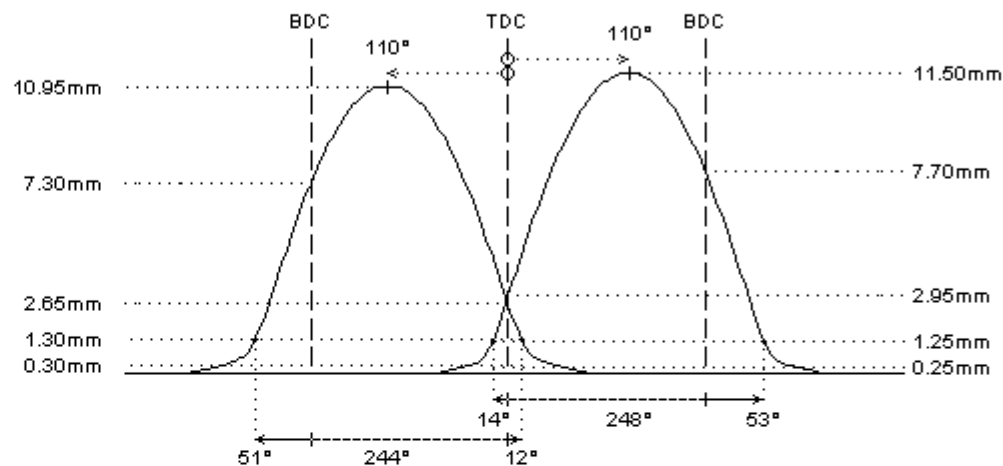
sport

Volvo B230 B19 - B21 - B23 - B230

I-4cyl 2.3L 8v SOHC (DTs/DTs)



	intake	exhaust
camshaft data:		
lash ramp	: 0.25mm	0.30mm
duration @ 0.1mm	: 283°	288°
duration @ 1.0mm	: 247°	243°
valve lift	: 11.50mm	10.95mm
cam lift	: 11.50mm	10.95mm
lobe angle	: 110°	110°
timing @ 1.0mm	: 14° / 53°	51° / 12°
valve lift @ TDC	: 2.95mm	2.65mm
parts setup:		
cam wheels :	:	:
follower :	O.E.M.	O.E.M.
valve lash :	O.E.M.	O.E.M.
valve :	O.E.M.	O.E.M.
valve locks :	O.E.M.	O.E.M.
upper retainer :	O.E.M.	O.E.M.
lower retainer :	O.E.M.	O.E.M.
exterior spring :	O.E.M.	O.E.M.
interior spring :		
fitted load / length	: 30kg @ 38.0mm	: 30kg @ 38.0mm
max. load / lift	: 80kg @ 12.0mm	: 80kg @ 12.0mm

REMARKS :**REMARKS :**

- # Volvo has used many different camshaft specifications. Please indicate STD cam base diameter and cam height when ordering sports camshafts. Depending on the engine version and application, extra modifications may be required.