

O.E.M.


Volvo B5234T4 250hp

I-5cyl 2.3L 20v DOHC (DTH/DTH)



	intake	exhaust
camshaft data:		
lash ramp	: hydro	hydro
duration @ 0.1mm	: 243°	242°
duration @ 1.0mm	: 202°	202°
valve lift	: 7.95mm	7.95mm
cam lift	:	
lobe angle	: 110°	110°
timing @ 1.0mm	: -9° / 31°	32° / -10°
valve lift @ TDC	: 0.40mm	0.35mm
parts setup:		
cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: O.E.M.	: O.E.M.
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: O.E.M.	: O.E.M.
interior spring	:	:
fitted load / length	: 21kg @ 34.0mm	: 21kg @ 34.0mm
max. load / lift	: 51kg @ 10.5mm	: 51kg @ 10.5mm

REMARKS :

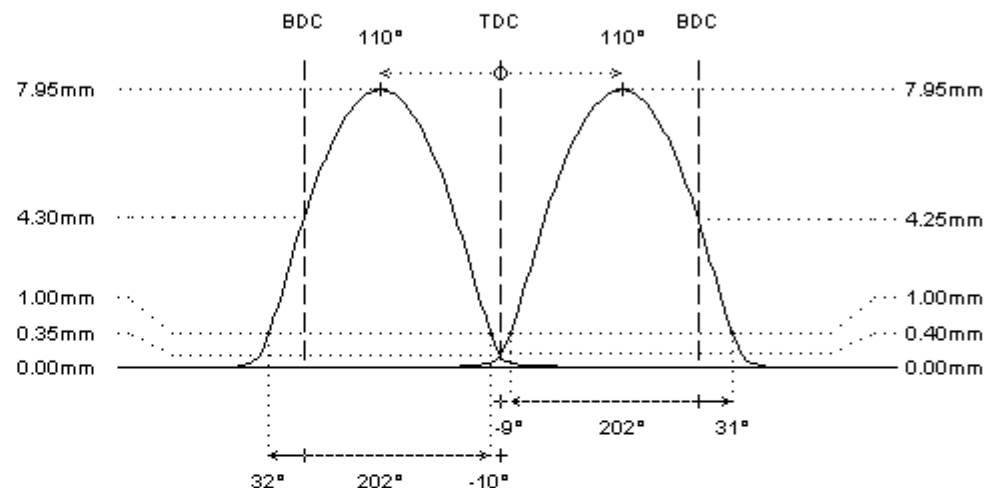

REMARKS :

- # Please double check before ordering:
 - axial thrust width: 4.5mm
 - cam base diameter: 32mm
 - hydraulic cam followers
 - no VVT