

7902713

hot street - dirt track

Volvo B5234T4 250hp

I-5cyl 2.3L 20v DOHC (DTH/DTH)



intake

exhaust

camshaft data:

lash ramp	: hydro	hydro
duration @ 0.1mm	: 258°	239°
duration @ 1.0mm	: 224°	208°
valve lift	: 10.00mm	8.50mm
cam lift	:	
lobe angle	: 110°	120°
timing @ 1.0mm	: 2° / 42°	44° / -16°
valve lift @ TDC	: 1.20mm	0.10mm


parts setup:

cam wheels :	:	:
follower	: O.E.M.	: O.E.M.
valve lash	: O.E.M.	: O.E.M.
valve	: O.E.M.	: O.E.M.
valve locks	: O.E.M.	: O.E.M.
upper retainer	: 99383/s	: 99383/s
lower retainer	: O.E.M.	: O.E.M.
exterior spring	: PAC-S90019	: PAC-S90019
interior spring	:	:

fitted load / length	: 31kg @ 35.5mm	: 31kg @ 35.5mm
max. load / lift	: 81kg @ 12.5mm	: 81kg @ 12.5mm

REMARKS :

check std valve spring setup for coil bind length and use valve spring kit if required

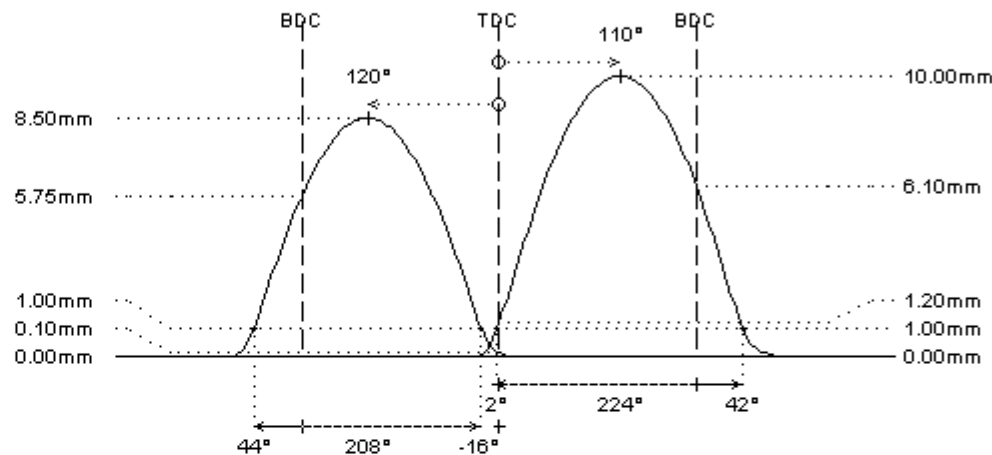

REMARKS :

- # Please double check before ordering:
 - axial thrust width: 4.5mm
 - cam base diameter: 32mm
 - hydraulic cam followers
 - no VVT
- # for BIG TURBO conversion (std to big turbo)